



# Nokia 3120 SIM Card Replacement

This guide directs the user to repair or install a SIM card.

Written By: Justin Emerson



## INTRODUCTION

The SIM card is used to store information and it is well hidden under the battery. It is very easy to open once you know where it is.

---



### TOOLS:

- [Probe and Pick Set](#) (1)
-

## Step 1 — Battery Installation



- Remove the back cover plate of the phone. To do this press down the lock as you slide the cover toward the bottom of the phone.


## Step 2



- Once the back cover plate is removed, the battery should be exposed. Remove the battery by prying it out. This can be done with your finger-nail or a prying tool.




## Step 3 — SIM Card

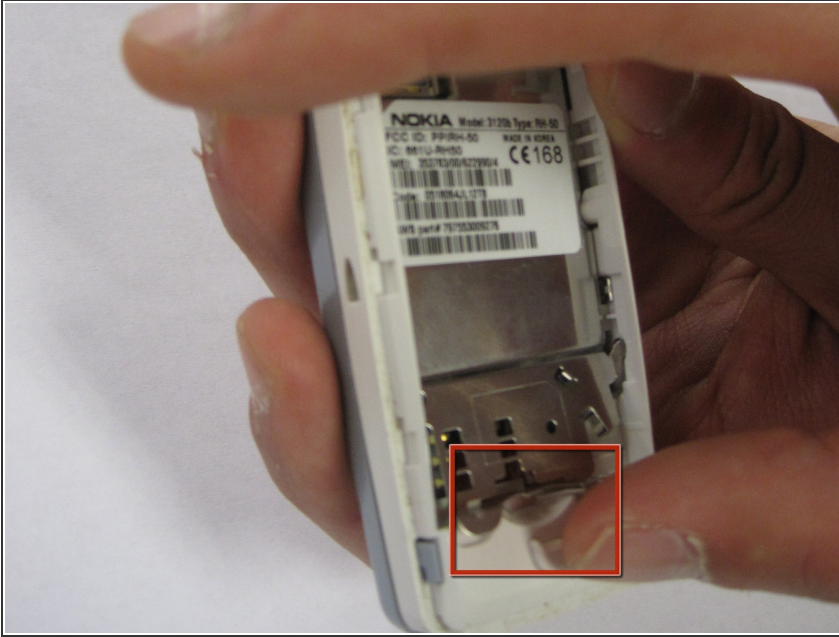

- Once the battery is removed, the SIM card compartment will be exposed. Pry the compartment open as seen in the figure. This can be done using your fingernail or a prying mechanism.

## Step 4

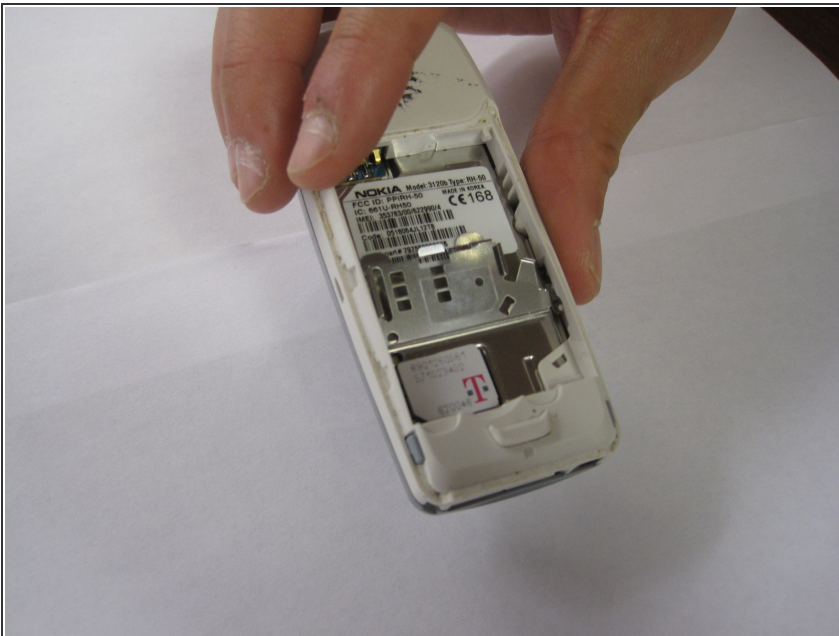

- Once the SIM card compartment has been opened, insert the SIM card into the slot provided on the left side.

To reassemble your device, follow these instructions in reverse order.